


TYPICAL HEAT PUMP or COIL PIPING DETAIL (NO CONTROL VALVE)

Note: Detail shown as plain view and is not to scale.

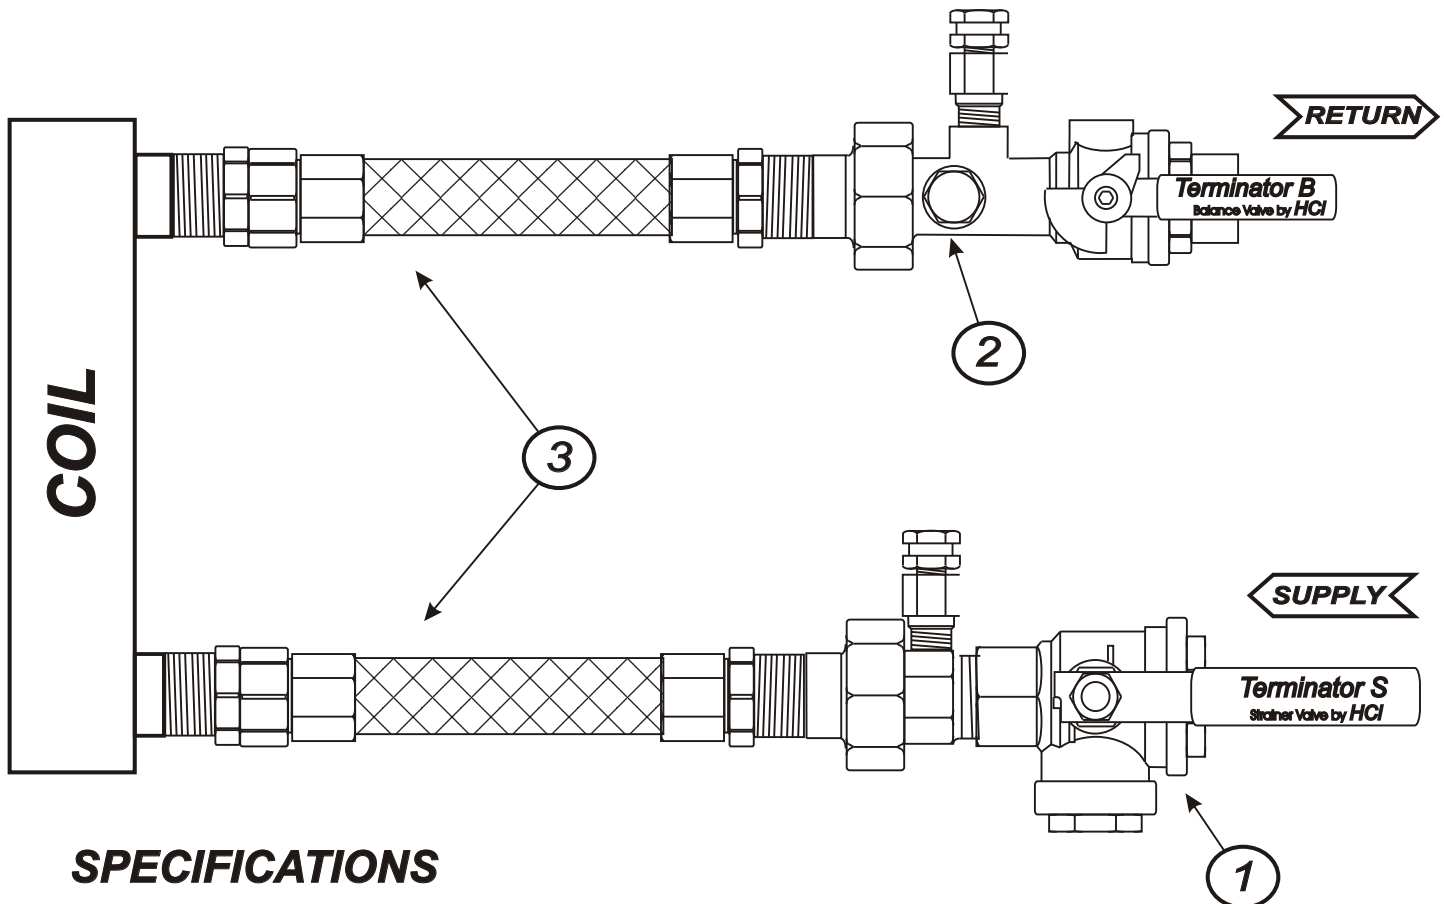

SPECIFICATIONS

1. **Terminator S** - Forged brass body, full port chrome plated brass ball, triple seal repackable blowout-proof stem with two Viton O-rings & teflon packing, integral stainless steel strainer basket serviceable without draining pipe or coil, with dielectric union & 1/4" pressure temperature readout port.
2. **Terminator B** - Balance/shutoff valve with forged brass body, chrome plated brass ball, repackable blowout-proof stem with two Viton O-rings & teflon packing, high-signal, low-loss venturi, and integrated union, 1/4" pressure temperature readout ports and memory stop.
3. **Flexible Connectors** - Stainless steel braided hose with EPDM inner core. Provided with MNPT x FEMALE SWIVEL NPSM MALE cone to MNPT adaptor. Available in length's 12", 18" 24" & 36"

NOTE:

Items 1 & 2 to be supplied to the jobsite as prepackaged components boxed and tagged per terminal unit. Specification information on individual components within the package available upon request. Detail shown as plan view only and is not to scale. Actual piping may vary to accommodate physical constraints.

AVAILABLE OPTIONS - Drain valve, manual & automatic air vent, memory stop ,handle & accessory extension, Red aluminum T-handle, stainless steel round handle & schrader valves.

JOB: _____ ENGINEER: _____ DWG NO: PP0001d
 REP: _____ CONTRACTOR: _____ DRAWN BY: MAW
 DATE: 8-9-01